



#5

U.S.A.



INVESTOR IN PEOPLE

The Patent Office
Concept House.
Cardiff Road
Newport
South Wales
NP10 8QQ

jc504 U.S. PTE
09/551760
04/18/00


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

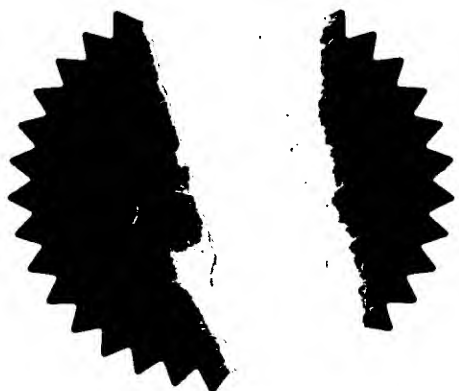

Signed *AT Evans*

Dated 29 March 2000


THIS PAGE BLANK (USPTO)

7/77

D

Patents Act
1977
(Section 15)

Statement of inventorship and of right to grant of a patent



The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference P/61741.GBA
2. Patent application number
(if you know it) 9908848.6
3. Full name of the or of each applicant
MARCONI COMMUNICATIONS LIMITED
4. Title of the invention
COMMUNICATIONS SYSTEM
5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent By virtue of Section 39(1) of the 1977 Patents Act
6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c)) 0
7. I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.

Signature P. F. Hoste
C F HOSTE

Date
30.04.99
8. Name and daytime telephone number of
person to contact in the United Kingdom A P CARDUS
01245 275124

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the
inventors in the boxes and underline the surnames

RICHARD JOHN PROCTOR
28 DIPROSE ROAD
CORFE MULLEN
WIMBORNE
DORSET

4330585001

Reminder

Have you signed the form?

Patents Form 7/77

Patents ADP number (if you know it)

Patents
Form 1/77

Patents Act
1977
(Rule 16)

1/77

The
Patent
Office

PATENT OFFICE
A
19 APR 1999
RECEIVED BY FAX

LAPO99 E440834-1 000314
P01/7700 0.00 - 9908848.6

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference P/61741

2. Patent application number
(The Patent Office will fill in this part) **9908848.6** **19 APR 1999**

3. Full name, address and postcode of the or of each applicant (underline all surnames)
Patents ADP number (if you know it)
If the applicant is a corporate body, give the country/state of its incorporation
MARCONI COMMUNICATIONS LIMITED
P O BOX 53, NEW CENTURY PARK
COVENTRY
ENGLAND
CV3 1HJ

A/C dated 24/5/99

Recd 24/5/99 fm.

ENGLAND. 7519200001

4. Title of the invention COMMUNICATIONS SYSTEM

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent
(including the postcode)
Patents ADP number (if you know it)
C F HOSTE
GEC PATENT DEPARTMENT
WATERHOUSE LANE
CHELMSFORD
ESSEX CM1 2QX

6528202001

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body
See note (d)
YES

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9	/
Claim(s)	6	/ n
Abstract	1	/
Drawing(s)	7	/

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature
C F Hoste

Date
19.4.99

12. Name and daytime telephone number of person to contact in the United Kingdom

A P Cardus

01245 275124

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

1

P/61741

COMMUNICATION SYSTEMS

The present invention relates to the field of communications and in particular to a communications system for the transport of ATM and AAL2-type signals.

The Universal Test and Operations PHY Interface for ATM (UTOPIA) bus defines an interface between the physical layer (PHY) and upper layer modules such as the ATM layer and various management entities in an ATM communications system. Two versions of UTOPIA bus have been defined by the ATM forum; UTOPIA level 1 is defined in "UTOPIA, an ATM-PHY Interface" specification level 1, version 2.01, March 21 1994 (af-phy-0017.000) and UTOPIA level 2 is defined in af-phy-0039.000, June 1995. The UTOPIA bus structure supports ATM cells. UTOPIA level 2 also allows for shared interfaces that support many devices. UTOPIA comprises a data bus for carrying ATM cells and sufficient control information to control access to the interfaces. The control information may be carried via the data bus or using external control signals in parallel with the data bus.

The goal of the UTOPIA standard is to define a common, standard interface between ATM and PHY layers of ATM sub-systems. UTOPIA level 1 supports data rates up to 155Mbit/s via an 8bit data bus. UTOPIA level 2 supports data rates of up to 622Mbit/s via an 8 or 16 bit data bus.

The International Telecommunication Union has defined in ITU-TI.363.2 B-ISDN ATM adaptation layer type 2 (AAL2). This specification includes definitions for so-called "AAL2

mini-cells" i.e. the common part sub-layer (CPS) packet. These AAL2 mini-cells are supported by ATM communication networks and currently a significant amount of traffic is carried in this form. The UTOPIA buses, as currently defined, are unable to carry AAL2 mini-cells. The arrangement of the present invention allows mini-cells and ATM cells to be carried via the same bus.

The present invention provides a communications system comprising a common device and a plurality of higher layer devices connected via a bus for the communication of data traffic between the common device and the higher layer devices in which the bus comprises lines for carrying data and control signals; in which the data traffic comprises data in ATM form and data in AAL2 form; in which the devices comprise discrimination means for discriminating between the two forms of data traffic.

In a preferred embodiment, the invention provides the communications system of Claim 1 in which the data in AAL2 form comprises an AAL2 mini-cell associated with a means of identification of the source or destination of the mini-cell.

The invention also provides a method for the communication of data traffic via a bus between a common device and a plurality of higher layer devices; in which the bus comprises lines for carrying data and control signals; in which the data traffic comprises data in ATM form and data in AAL2 form; the method comprising the step of discriminating between the two forms of data traffic.

In a further embodiment, the invention provides a method for the communication of data traffic

via a bus between one or more common devices and a plurality of higher layer devices; in which the bus comprises lines for carrying data, control and address signals; in which the address signals are for selecting a device from more than one common device or from the plurality of higher layer devices; in which the data traffic comprises data in ATM form and data in AAL2 form; the method comprising the step of discriminating between the two forms of data traffic.

In a further embodiment, the invention provides a method in which the data in AAL2 form comprises an AAL2 mini-cell associated with a means of identification of the source or destination of the mini-cell.

The invention will now be described in more detail by way of example and with reference to the accompanying drawings in which:

Figure 1 shows the components of the UTOPIA bus of the prior art;

Figures 2 and 3 show UTOPIA cell formats of the prior art;

Figure 4 shows the AAL min-cell format of the prior art;

Figure 5 shows a bus according to an embodiment of the present invention;

Figures 6a and 6b show formats of a mini-cell according to further embodiments of the present invention;

Figure 7 shows a format of a mini-cell according to a further embodiment of the present invention.

Referring to Figure 1, the ATM layer is linked via the UTOPIA bus to the physical (PHY) layer by means of a data bus in each direction and a set of control signals in each direction. By convention information flowing from the ATM layer to the PHY layer is termed 'transmit' and

information flowing in the opposite direction is termed 'receive'.

The following control signals are defined as part of the UTOPIA buses (both 8 and 16 bit). In the receive direction the start-of-cell signal (RxSOC) is active for one clock cycle when the receive data contains the first valid octet of a cell. Also defined are the enable signal (RxEnb) and the receive empty/cell available signal (RxEMPTY/RxClav). Synchronisation from the ATM layer to the PHY layer is provided by the receive clock (RxClk) for synchronising receive data.

The following signals are defined as part of the UTOPIA buses in the transmit direction. The transmit start-of-cell signal (TxSOC) is activated for one clock cycle by the ATM layer when the first valid octet of a cell is put on the transmit data bus. Also defined are the transmit enable signal (TxEnb) and the transmit full/cell available signal (TxFull/Clav). The transmit clock (TxClk) is provided by the ATM layer for synchronising transmit data transfers.

In addition address lines may be present to enable selection by the ATM layer interface of a particular PHY layer interface from a plurality of the same and/or to enable selection by the PHY layer interface of a particular ATM layer interface from a plurality of the same.

Figure 2 shows the format of a UTOPIA cell as defined for the 8 bit mode and Figure 3 shows the cell format for the 16 bit mode. In the 8 bit mode the cell format comprises four octets of header, one user defined octet (UDF) and forty-eight octets of payload. In the 16 bit mode the cell format comprises four octets of header, two user defined octets (UDF 1, UDF2) and again forty-eight octets of payload. The UDF fields received may carry header error correction (HEC)

information. However this information is not used and thus the field may be overwritten for the purposes of the present invention.

Figure 4 shows the AAL2 mini-cell (CPS packet). The AAL2 mini-cell comprises three octets of header (CPS-PH) and a variable length payload. The header comprises the channel identifier (CID) the length indicator (LI) which defines the length of the mini-cell payload, the user-to-user indication (UII) and the header error control (HEC). The mini-cell payload and, as a result the mini-cell itself, is variable in length and interfaces processing such mini-cells use the length indication (LI) field to check the length of the mini-cell.

Figure 5 shows a bus according to the present invention. The bus is shown joining a number of higher layer devices including ATM layer devices and AAL2 layer devices with a single physical layer (PHY) device. The number of higher layer devices is not restricted except that there must be at least one of each type in communication with the bus. In an alternative embodiment (not shown) a plurality of physical layer (PHY) devices may be connected via the bus to a small number of higher layer devices.

Where a mini-cell is to be transferred, it is necessary to identify either the source or the destination of the mini-cell and for this identity to be transported with the mini-cell. This may be achieved according to the present invention by associating with the mini-cell the relevant VCI and VPI values, the PCM number and PCM circuit number or, as the case may be, the SDH virtual container identity depending on the direction of the data transfer. Figure 6a shows the format of an information structure comprising a mini-cell according to an embodiment of the present invention. The mini-cell comprises four octets of ATM cell header, one octet of UDF,

together with a mini-cell. The ATM header comprises the following fields, as defined in the relevant standards, GFC, VPI, VCI, PTI and CLP. The CPS packet comprises the CPS packet header (CPS-PH) as described above with reference to Figure 4 and the rest of the mini-cell comprises the variable length CPS payload which may be between 1 and 64 bytes long. The functions of the CPS packet header are as described above and will not be described further here. The ATM cell header comprises virtual path identity (VPI) and virtual channel identity (VCI) information to allow identification of the appropriate ATM virtual path and virtual channel for the mini-cell.

Figure 6b shows the format of an information structure comprising a mini-cell according to a further embodiment of the present invention. The information structures of Figures 6a and 6b are very similar, the difference being that in the information structure of Figure 6b, the UDF of the ATM header is omitted, thereby saving one octet.

For both formats, the discrimination between ATM and mini-cell data traffic is based on the contents of fifth octet of the information structure. Hence, in the arrangement of Figure 6a this is the UDF and in the arrangement of Figure 6b the CID. The contents of this octet would then be interpreted as follows. Where the content of the octet is zero it is interpreted as a valid ATM UDF and a normal ATM cell will be expected to follow. Where the content of the octet is non-zero, an AAL2 CID mini-cell will be expected to follow. Two alternatives now exist. In the arrangement of Figure 6a, the next octet (i.e. the sixth) will contain the CID and will be read to identify the channel. In the arrangement of Figure 6b, the non-zero value of the fifth octet is the CID octet and will be read to identify the channel. The above arrangement is compatible with the ITU-T definition of mini-cells where a zero value of CID is not used for channel

identification.

Figure 7 shows the format of an information structure in the form of a mini-cell according to a second embodiment of the present invention. The lower part of the information structure of Figure 7 comprises the CPS packet similar to that described above in relation to the embodiment of Figure 6, however instead of the ATM header octets, the upper part of the information structure now comprises a PCM number for identifying a pulse code modulation (PCM) and a PCM circuit number for identifying a PCM circuit over which the mini-cell is to be routed. As a further alternative (not shown) the PCM information could be replaced with the identity of a synchronous digital hierarchy (SDH) virtual container.

The operation of the communications system of the present invention will now be described. Discrimination between forms of data traffic, i.e. ATM and AAL2, may be achieved, according to the present invention, as follows. Each interface to the bus may be arranged to use a control signal from the bus for discriminating between the two forms of data traffic. Advantageously, the control signal is the start of cell (SOC) signal. The signal is defined in the UTOPIA recommendations as going active for a single cycle of the relevant synchronising clock signal (i.e. either RxClk or TxClk) to indicate the start of an ATM cell. According to the present invention, the SOC signal is defined as going active for two successive cycles of the relevant synchronising clock signal to indicate transmission of a mini-cell. Alternatively, an additional signal may be provided on the bus, i.e. in addition to those defined in UTOPIA recommendations for this purpose.

According to a further, preferred embodiment, the discrimination means comprises means to

use a field of the data traffic for discriminating between the two forms of data traffic. Advantageously, the field used is the user defined field (UDF) in the ATM data or the CID field in the AAL2 data. The AAL2 CID field has no defined meaning for a zero value (other than as null filler) which should never be seen in a valid mini-cell, whereas the content of the ATM UDF field is arbitrary and could, according to a further embodiment, be used to discriminate between more than two forms of data.

The interfaces are advantageously adapted, according to this invention, to identify the position in the data stream of UDF and CID octets and to interpret the associated data according the value found in those octets. Alternatively, the second octet of a 16 bit UDF field could be used for this purpose.

In further preferred embodiment, the contents of the VPI field or the VPI and VCI fields taken in combination is used to discriminate between the two forms of data traffic. According to this embodiment, VPs or VP/VC combinations are allocated according to the type of data traffic to be carried. Advantageously, only the top bit of the VPI field would be used in this way, e.g. with a value of zero indicating an ATM cell and a value of one indicating a mini-cell.

In a preferred embodiment, each mini-cell forms part of an ATM virtual path (VP) and/or virtual channel (VC) and the identity of the relevant VP or VC must be transferred across the bus in association with each mini-cell. A VP indication (VPI) field and a VC indication (VCI) field are defined in ATM standards for the purpose of identifying VPs and VCs respectively. Hence, each mini-cell transported via the bus is associated with an ATM header comprising a virtual path indication (VPI) field and a virtual channel indication (VCI) field for use for

determining the relevant VP and VC.

In a further, preferred embodiment of the present invention, the form of data traffic is discriminated by a combination of two or more of the above means. The present invention is also applicable to other types of bus, such as UTOPIA levels 3 and 4.

CLAIMS

1. A communications system comprising a common device and a plurality of higher layer devices connected via a bus for the communication of data traffic between the common device and the higher layer devices in which the bus comprises lines for carrying data and control signals; in which the data traffic comprises data in ATM form and data in AAL2 form; in which the devices comprise discrimination means for discriminating between the two forms of data traffic.
2. The communications system of Claim 1 in which the data in AAL2 form comprises an AAL2 mini-cell associated with a means of identification of the source or destination of the mini-cell.
3. The communications system of Claim 2 in which the means of identification comprises an ATM header.
4. The communications system of Claim 3 in which the data in AAL2 form is associated with an ATM virtual path (VP) and an ATM virtual channel (VC), in which the ATM header comprises a virtual path identifier (VPI) field and a virtual channel identifier (VCI) field; the VPI and VCI fields for use for determining the associated VP and VC respectively.
5. The communications system of Claim 2 in which the means of identification comprises a pulse code modulation (PCM) circuit identifier.

6. The communications system of Claim 2 in which the means of identification comprises the identity of a synchronous digital hierarchy (SDH) virtual container.
7. The communications system of any above claim in which the common device comprises an ATM physical layer (PHY) and the plurality of higher layer devices comprise an ATM layer and an AAL2 layer.
8. The communications system of any above claim in which the discrimination means comprises means for using a control signal from the bus for discriminating between the two forms of data traffic.
9. The communications system of Claim 8 in which the control signal is the start of cell (SOC) signal.
10. The communications system of Claim 9 in which the discrimination means comprise means to discriminate between the two forms of traffic depending on the number of clock cycles the SOC signal is active.
11. The communications system of Claim 8 in which the control signal is an additional signal.
12. The communications system of any one of Claims 1 to 7 in which the discrimination means comprises means for using a field of the data traffic for discriminating between the two forms of data traffic.

13. The communications system of Claim 12 in which the data traffic comprises a user defined field (UDF) in which the field for use for discriminating is the UDF.
14. The communications system of Claim 12 in which the data in AAL2 form comprises an AAL2 mini-cell and the data in ATM form comprises an ATM cell, in which the field for use for discriminating comprises the fifth octet of the cells.
15. The communications system of Claim 14 in which the fifth octet of the AAL mini-cell comprises a channel identification (CID) field.
16. The communications system of any above claim in which the bus comprises lines for carrying address signals for selecting a device from the plurality of higher layer devices.
17. The communications system of any above claim comprising a plurality of common devices in which the bus comprises lines for carrying address signals for selecting a device from the plurality of common devices.
18. A method for the communication of data traffic via a bus between a common device and a plurality of higher layer devices; in which the bus comprises lines for carrying data and control signals; in which the data traffic comprises data in ATM form and data in AAL2 form; the method comprising the step of discriminating between the two forms of data traffic.

19. A method for the communication of data traffic via a bus between one or more common devices and a plurality of higher layer devices; in which the bus comprises lines for carrying data, control and address signals; in which the address signals are for selecting a device from more than one common device or from the plurality of higher layer devices; in which the data traffic comprises data in ATM form and data in AAL2 form; the method comprising the step of discriminating between the two forms of data traffic.
20. The method of any one of Claims 18 and 19 in which the data in AAL2 form comprises an AAL2 mini-cell associated with a means of identification of the source or destination of the mini-cell.
21. A method of Claim 20 in which the means of identification comprises an ATM header.
22. The method of Claim 21 in which the means of identification comprises a VCI field and/or a VPI field.
23. The method of Claim 20 in which the means of identification comprises a PCM circuit identifier.
24. The method of Claim 20 in which the means of identification comprises the identity of a SDH virtual container.
25. The method of any one of Claims 18 to 24 in which the or each common device comprises an ATM physical layer (PHY) and the plurality of higher layer devices

comprise an ATM layer and an AAL2 layer.

26. The method of any one of Claims 18 to 25 comprising the step of using a control signal of the bus for discriminating between the two forms of data traffic.
27. The method of Claim 26 in which the control signal is the start of cell (SOC) signal.
28. The method of Claim 27 comprising the steps of monitoring the SOC signal and discriminating between the two forms of data on the basis of the number of clock cycles the SOC signal is active.
29. The method of Claim 26 in which the control signal is an additional signal.
30. The method of any one of Claims 18 to 25 comprising the step of using a field of the data traffic for discriminating between the two forms of data traffic.
31. The method of Claim 30 in which the data traffic comprises a UDF in which the field for use for discriminating is the UDF.
32. The method of Claim 30 in which the data in AAL2 form comprises an AAL2 mini-cell and in which the data in ATM form comprises an ATM cell, the method comprising the step of using the fifth octet of the cells for discriminating.
33. The method of Claim 30 in which the field for use for discriminating is the VCI field

and/or the VPI field.

34. The method of Claim 30 in which the data traffic comprises a PCM field in which the field for use for discriminating is the PCM field.
35. A communications system substantially as described with reference to and as illustrated in Figures 5 to 7 of the drawings.

ABSTRACT

A communications system comprising a common device (e.g. an ATM physical layer (PHY)) and higher layer devices (e.g. an ATM layer and an AAL2 layer) are connected via a bus for communication of traffic therebetween, the bus comprising lines for carrying data and control signals. The bus supports data in ATM form and AAL2 form and the devices comprise discrimination means for discriminating between the two forms of data traffic. The data in AAL2 form typically comprises AAL2 mini-cells associated with a means of identification of the source or destination of the mini-cells.

P/61741.GBA

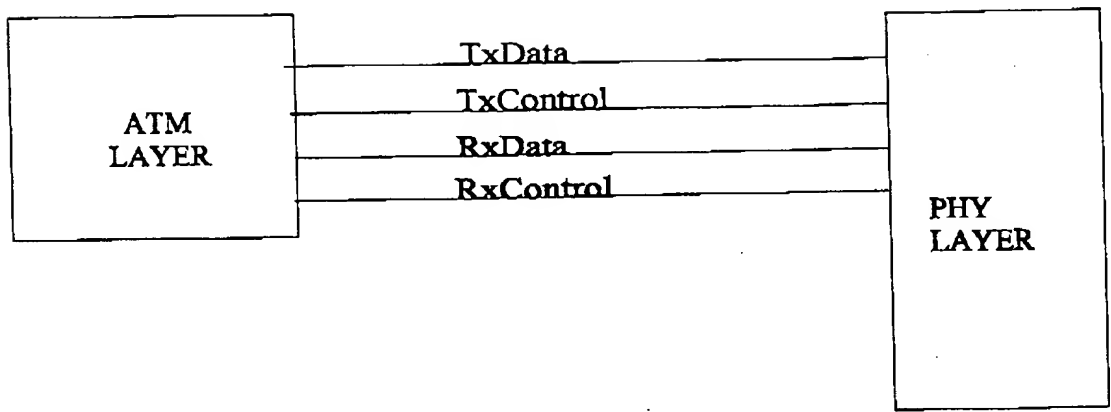


FIG.1

THIS PAGE BLANK (USPTO)

P/61741.GBA

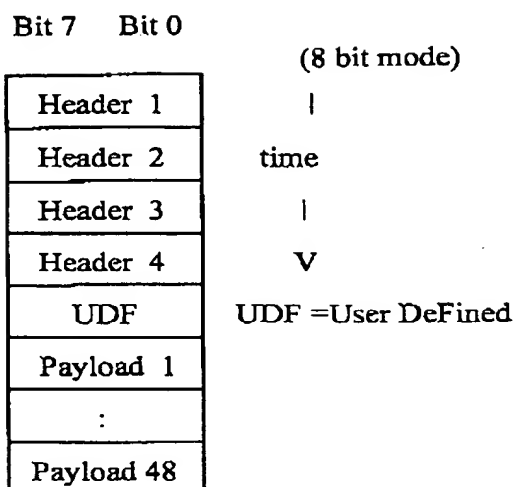


FIG. 2

THIS PAGE BLANK (USPTO)

P/61741.GBA

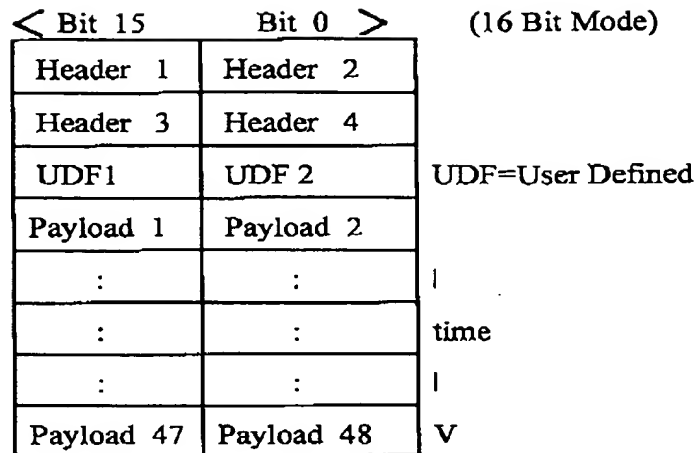


FIG. 3

THIS PAGE BLANK (USPTO)

P/61741.GBA

CID	LI	UUI	HEC	CPS-INFO
-----	----	-----	-----	----------

CPS-Packet Header (CPS-PH)

CPS-Packet Payload (CPS-PP)

FIG.4

THIS PAGE BLANK (USPTO)

P/61741

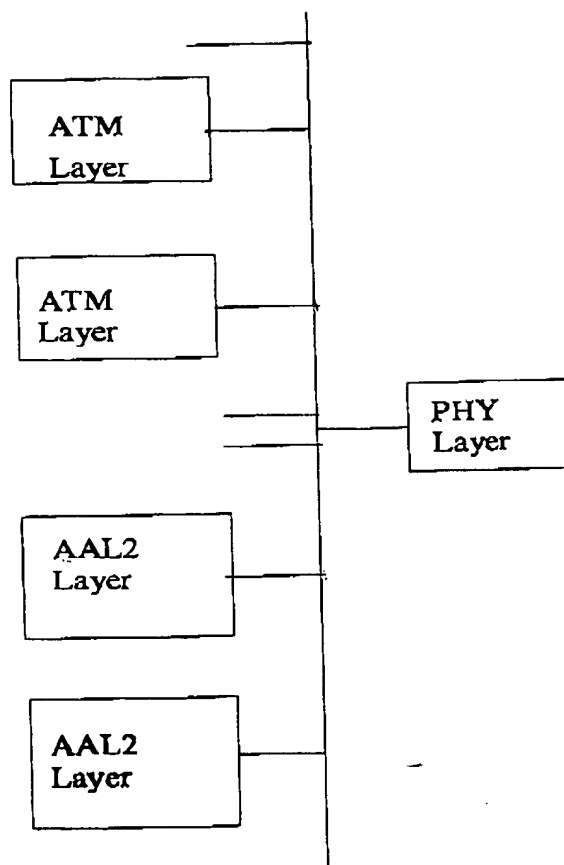


FIG.5

THIS PAGE BLANK (USPTO)

P/61741.GBA

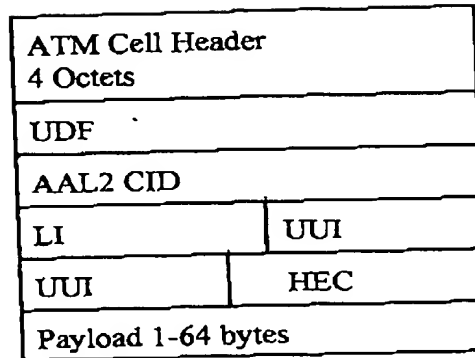


FIG. 6a

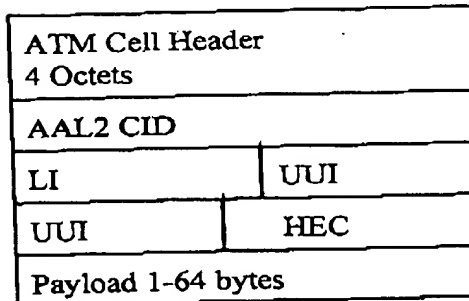


FIG 6b

THIS PAGE BLANK (USPTO)

P/61741.GBA

PCM	
PCM	Circuit
AAL2 CID	
L1	UUI
UUI	HEC
Payload (1-64 octets, typically 40 for PCM voice)	

FIG. 7

THIS PAGE BLANK (USPTO)